




TEST SIEVES WITH INOX MESH, NYLON MESH OR PERFORED PLATE

Filtra laboratory test sieves, are manufactured entirely from stainless steel of either woven wire mesh or perforated plate, round, square or slotted, fully compliant to national and international standards UNE, ISO, ASTM, AFNOR, BS, etc.

Labeling of the test sieves by individualized laser engraving, including the standard, serial number, diameter of the sieve and aperture mesh to provide full traceability.

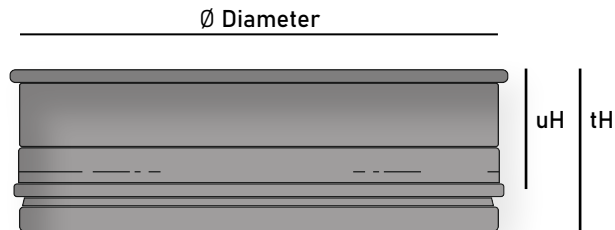

D	uH	tH	W	V
60	23	35	60	5
60	75	86	120	15
75	33	43	85	25
75	60	73	100	40
100	22	32	100	50
100	52	60	150	75
125	22	34	165	85
150	32	41	200	100
150	50	60	250	120
200	25	40	450	70
200	50	64	500	140
200	100	120	800	250
200	200	220	1000	500
200BA	15	50	450	35
203	25	40	450	70
203	50	64	500	140
250	70	89	900	280
300	80	97	1250	560
305	50	64	1250	560
315	53	71	1300	560
350	80	98	1500	600
400	65	85	1700	600
400	100	115	2000	650
450	100	110	2200	750
500	100	115	3000	850
600	110	130	3600	1000

D = diameter (mm) uH= useful height (±3mm)

tH = Total height (±4mm) W = Theoretical Weight (g)

V = volume recommended (opening mesh of 1mm (cm³))

TEST SIEVES

ADVANTAGES:

- ▶ Filtra Vibración laboratory test sieves, are fully compatible with one another and with other standard sieves.
- ▶ Two pieces construction of stainless steel, to could change the mesh when get damaged, deteriorated or out of standards.
- ▶ Unique mass production and quality control, accordance with UNE-EN ISO 9001:2015, ensuring a perfect control of all the components of the test sieve.
- ▶ Each test sieve issued a certificate of compliance in conformity with standard EN 10204 2.1.
- ▶ All our test sieves include a rubber gasket to ensure its tightness.
- ▶ Management system as per ISO 9001:2015 certified by BUREAU VERITAS for the production of laboratory sieve.



BUREAU
VERITAS



LABORATORY TEST

Set up the first ENAC accredited laboratory in Spain (Accreditation no. 310/LE683) for the carrying out sieve tests for metal mesh and perforated plates in accordance with the following standards:

MESH	PLATES
UNE 7050-3	UNE 7050-4
ISO 3310-1	
ASTM E11	ISO 3310-2
ISO 9044	



The laboratory technical personnel, using artificial vision equipment and following methods established by the UNE-EN ISO/IEC 17025:2005 regulation governing our quality systems, carry out necessary measurements and calculations in order to issue a trial report which, together with other results, determines whether the mesh or perforated plate of the examined sieve conforms to the reference regulation.

ENAC accreditation is recognized internationally through MLA (Multilateral Agreement) or MRA (Mutual Recognition Agreement).



mm (milimeters)

UNE 7050-3 ISO 3310-1	ASTM E11	
W*	W*	N°
125	125	5 in.
112		
106	106	4,24 in.
100	100	4 in.
90	90	3 1/2 in.
80		
75	75	3 in.
71		
63	63	2 1/2 in.
56		
53	53	2,12 in.
50	50	2 in.
45	45	1 3/4 in.
40		
37,5	37,5	1 1/2 in.
35,5		
31,5	31,5	1 1/4 in.
28		
26,5	26,5	1,06 in.
25	25	1 in.
22,4	22,4	7/8 in.
20		
19	19	3/4 in.
18		
16	16	5/8 in.
14		
13,2	13,2	0,53 in.
12,5	12,5	1/2 in.
11,2	11,2	7/6 in.

mm (milimeters)

UNE 7050-3 ISO 3310-1	ASTM E11	
W*	W*	N°
10		
9,5	9,5	3/8 in.
9		
8	8	5/16 in.
7,1		
6,7	6,7	0,265 in.
6,3	6,3	1/4 in.
5,6	5,6	31/2
5		
4,75	4,75	4
4,5		
4	4	5
3,55		
3,35	3,35	6
3,15		
2,8	2,8	7
2,5		
2,36	2,36	8
2,24		
2	2	10
1,8		
1,7	1,7	12
1,6		
1,4	1,4	14
1,25		
1,18	1,18	16
1,12		
1	1	18

(µm) Micrometers

UNE 7050-3 ISO 3310-1	ASTM E11	
W*	W*	N°
900		
850	850	20
800		
710	710	25
630		
600	600	30
560		
500	500	35
450		
425	425	40
400		
355	355	45
315		
300	300	50
280		
250	250	60
224		
212	212	70
200		
180	180	80
160		
150	150	100
140		
125	125	120
112		
106	106	140
100		
90	90	170
80		

(µm) Micrometers

UNE 7050-3 ISO 3310-1	ASTM E11	
W*	W*	N°
75	75	200
71		
63	63	230
56		
53	53	270
50		
45	45	325
40		
38	38	400
36		
32	32	450
25	25	500
20	20	635





ISO 5223
Slotted perforated Size
1 mm x 20 mm
1,5 mm x 20 mm
1,6 mm x 20 mm
1,7 mm x 20 mm
1,8 mm x 20 mm
1,9 mm x 20 mm
2 mm x 20 mm
2,2 mm x 20 mm
2.25 mm x 20 mm
2,5 mm x 20 mm
2,8 mm x 20 mm
3,5 mm x 20 mm
3,55 mm x 20 mm

mm (milimeters)

UNE 7050-3 ISO 3310-1	ASTM E11	
W*	W*	N°
■ ● 125	■ ● 125	5 in.
■ ● 112		
■ ● 106	■ ● 106	4,24 in.
■ ● 100	■ ● 100	4 in.
■ ● 90	■ ● 90	3 1/2 in.
■ ● 80		
■ ● 75	■ ● 75	3 in.
■ ● 71		
■ ● 63	■ ● 63	2 1/2 in.
■ ● 56		
■ ● 53	■ ● 53	2 1/8 in.
■ ● 50	■ ● 50	2 in.
■ ● 45	■ ● 45	1 3/4 in.
■ ● 40		
■ ● 37,5	■ ● 37,5	1 1/2 in.
■ ● 35,5		
■ ● 31,5	■ ● 31,5	1 1/4 in.
■ ● 28		
■ ● 26,5	■ ● 26,5	1 1/16 in.
■ ● 25	■ ● 25	1 in.
■ ● 22,4	■ ● 22,4	7/8 in.
■ ● 20		
■ ● 19	■ ● 19	3/4 in.
■ ● 18		
■ ● 16	■ ● 16	5/8 in.
■ ● 14		
■ ● 13,2	■ ● 13,2	17/32 in.
■ ● 12,5	■ ● 12,5	1/2 in.
■ ● 11,2	■ ● 11,2	7/6 in.

mm (milimeters)

UNE 7050-3 ISO 3310-1	ASTM E11	
W*	W*	N°
■ ● 10		
■ ● 9,5	■ ● 9,5	3/8 in.
■ ● 9		
■ ● 8	■ ● 8	5/16 in.
■ ● 7,1		
■ ● 6,7	■ ● 6,7	17/64 in.
■ ● 6,3	■ ● 6,3	1/4 in.
■ ● 5,6	■ ● 5,6	7/32 in.
■ ● 5		
■ ● 4,75	■ ● 4,75	3/16 in.
■ ● 4,5		
■ ● 4	■ ● 4	5/32 in.
● 3,55		
● 3,35	● 3,35	1/8 in.
● 3,15		
● 2,8	● 2,8	7/64 in.
● 2,5		
● 2,36	● 2,36	3/62 in.
● 2,24		
● 2	● 2	0,078 in.
● 1,8		
● 1,7	● 1,7	0,066 in.
● 1,6		
● 1,4	● 1,4	0,055 in.
● 1,25		
● 1,18	● 1,18	0,045 in.
● 1,12		
● 1	● 1	0,039 in.

*Other sizes available upon request.



Sieve with stainless steel frame and mesh.



Stainless steel sieve with square-holed perforated plate.



Stainless steel sieve with round perforated plate.



Stainless steel sieve with oval perforated plate. (ISO 5223)



Sieve with stainless steel frame and syntetic mesh (PA/PES).



Special test sieves: conical, double height, half height, etc.



Stainless steel lids and receivers in all sizes.



Stainless steel sieve with handles.



Balls used to open the mesh of sieve. (FDA)



Cleaning kit for laboratory sieves.